


Excel Solid Cat5e Cable F/UTP LSOH Euroclass Eca 305m Box Grey

Item Code: 100-216

excel
without compromise.

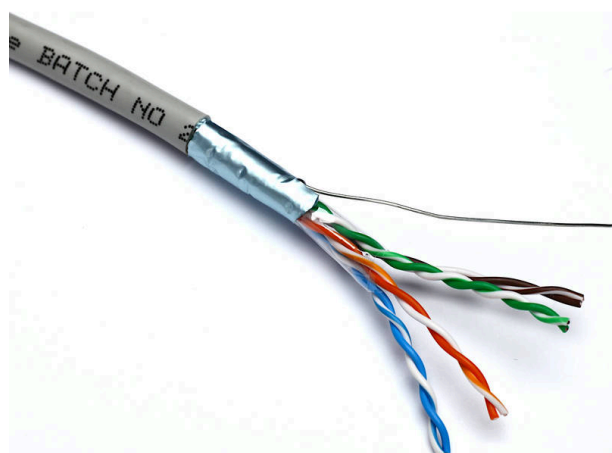

✕ Cat5e solid copper cable

✕ F/UTP overall foil screening

✕ No conductor screening

✕ Outer sheath colour grey (RAL7038)

✕ Reaction-to-fire class according to EN 13501-6: Eca

✕ 24 AWG size conductors

Product Overview

Excel solid Cat5e ethernet cable F/UTP CPR Euroclass Eca are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat 5e specifications, 305m boxes. Each cable consists of 8 colour coded solid copper conductors twisted together to form four pairs.

These pairs are wrapped in an aluminium mylar tape screen with a solid 24 AWG drain wire.

The whole cable is produced in PVC sheath which is metre marked and labelled with part code and DoP information.

Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	24
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	PE
Core identification	Colour
Overall screening	Foil
Conductor screening	None
Outer sheath material	PVC

Excel Solid Cat5e Cable F/UTP LSOH Euroclass Eca 305m Box Grey

Item Code: 100-216




Outer sheath colour	Grey
Reaction-to-fire class according to EN 13501-6	Eca
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Outer diameter approx.	6.4 mm
Installation Temperature Range	0...50 °C
Operating Temperature Range	-10...60 °C
Category	5E
NVP value	70 %

Cable specifications

Features	Values
Dielectric strength	2.5kV for 2s
Maximum pulling load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Cross-section diagram

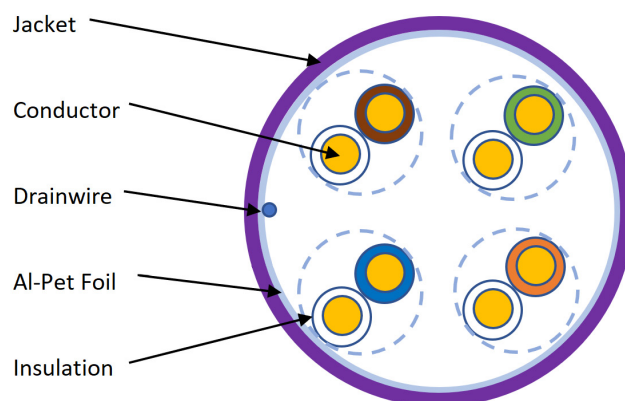

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS	Compliant to the Restriction of Hazardous Substances
WFD	Compliant to Waste Framework Directive
SCIP	Compliant - Does Not Contain Substances of Concern in Products

Excel Solid Cat5e Cable F/UTP LSOH Euroclass Eca 305m Box Grey

Item Code: 100-216



Part Number Table

Part Number	Description
100-216	Excel Solid Cat5e Cable F/UTP LSOH Euroclass Eca 305m Box Grey
100-217	Excel Solid Cat5e Cable F/UTP LSOH Euroclass Dca 305m Box Violet

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.