


# Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 1 m

Item Code: 200-005

**excel**  
without compromise.

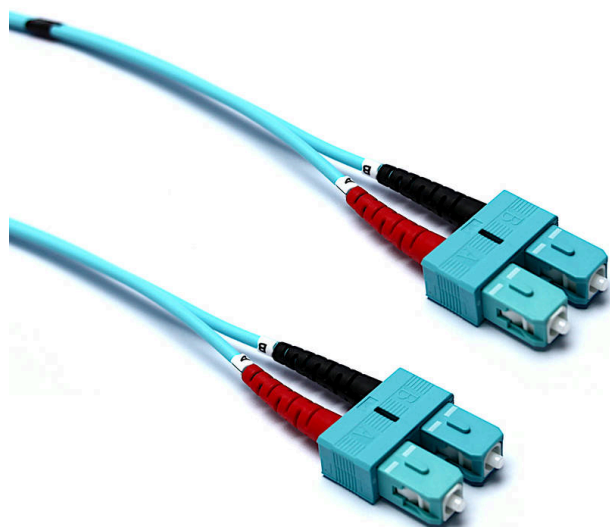

✕ Test Certificate Included

✕ Low Loss Connectors

✕ Zirconia Ceramic PC Ferrules

✕ Polarity Changeable (Duplex Connectors)

✕ Bend insensitive construction

✕ 25 Year system warranty

## Product Overview

Excel OM3 50/125  $\mu\text{m}$  duplex patch leads are manufactured from the highest quality 900  $\mu\text{m}$  buffer/jacket optical fibre, terminated with ceramic ferrule connectors.

Each cable has strain relief boots to prolong and maintain performance levels of the assembly, transmit and receive 'legs' of each duplex cable are identified by means of ring type cable marker fixed to each end the assembly. A short distance from these identification rings heat shrink is applied to maintain an easy to manage bonded two fibre cable, finally a label containing a unique batch number is fixed to the centre of cable for quality and traceability purposes.

## Product Specifications

| Feature                            | Values            |
|------------------------------------|-------------------|
| Fibre type                         | Multi mode 50/125 |
| Category                           | OM3               |
| Number of Cores                    | 2                 |
| Outer diameter sheath single fibre | 3 mm              |
| Cable type                         | Duplex            |
| Length                             | 1 m               |
| Type of connector connection 1     | SC                |
| Type of connector connection 2     | SC                |
| Outer sheath colour                | Aqua              |
| Strain relief boot                 | Push-on           |

# Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 1 m

Item Code: 200-005



|                 |                                   |
|-----------------|-----------------------------------|
| Flame retardant | In accordance with EN 60332-1-2   |
| Low smoke       | In accordance with IEC/EN 61034-2 |

## Cable specifications

| Features                     | Values              | ST Assemblies           | SC Assemblies           | LC Assemblies            |
|------------------------------|---------------------|-------------------------|-------------------------|--------------------------|
| Cable Construction           | Duplex zip-cord     |                         |                         |                          |
| No. of Fibres                | 2                   |                         |                         |                          |
| Cable Dimensions             |                     | 2.8 x 5.7mm             | 2.8 x 5.7mm             | 2.0 x 4.0mm              |
| Colour                       | Aqua                |                         |                         |                          |
| Strength members             | Aramid Yarn         |                         |                         |                          |
| Temperature range            | -20C to +70C        |                         |                         |                          |
| Connector Material           |                     | Nickel plated Brass     | Composite               | Composite                |
| Minimum bend radius (loaded) | 10 x cable diameter |                         |                         |                          |
| Connector Ferrule            |                     | 2.5mm Zirconium ceramic | 2.5mm Zirconium ceramic | 1.25mm Zirconium ceramic |
| Ferrule End Face             | PC Polish           |                         |                         |                          |
| Connector Insertion Loss     | Max. 0.3dB          |                         |                         |                          |

## Fibre specifications

| Features                             | Values         |
|--------------------------------------|----------------|
| Core diameter                        | 50 ± 2.5µm     |
| Core Non-circularity                 | ≤5%            |
| Core-Cladding Concentricity Error    | ≤1.0µm         |
| Cladding diameter                    | 125 ± 1.0µm    |
| Cladding Non-circularity             | ≤1.0%          |
| Primary Coating diameter             | 245 ± 7µm      |
| Coating-Cladding Concentricity Error | ≤10.0µm        |
| Coating Non-circularity              | ≤6.0%          |
| Secondary coating diameter           | 900 µm nominal |
| Max. attenuation at 850nm            | 2.4dB/km       |

# Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 1 m

Item Code: 200-005




|  |              |
|--|--------------|
| Max attenuation at 1300nm                            | 0.6dB/km     |
| Refractive Index at 850nm                            | 1.482        |
| Refractive Index at 1300nm                           | 1.477        |
| Bandwidth at 850nm                                   | ≥1500 MHz.km |
| Bandwidth at 1300nm                                  | ≥500 MHz.km  |
| Effective Modal Bandwidth at 850nm                   | ≥2000 MHz/km |
| Numerical Aperture                                   | 0.200 ±0.015 |
| Zero Dispersion Wavelength                           | 1295-1340nm  |
| Macrobending Loss - 100 turns, 37.5mm Radius, 850nm  | ≤0.50dB      |
| Macrobending Loss - 100 turns, 37.5mm Radius, 1300nm | ≤0.50dB      |
| Macrobending Loss - 2 turns, 15mm Radius, 850nm      | ≤1.0dB       |
| Macrobending Loss - 2 turns, 15mm Radius, 1300nm     | ≤1.0dB       |
| Coating Strip Force (typical)                        | 1.5N         |
| Coating Strip Force (peak)                           | 1.3 - 8.9N   |

# Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LSOH Aqua 1 m

Item Code: 200-005




## Cross-section diagram

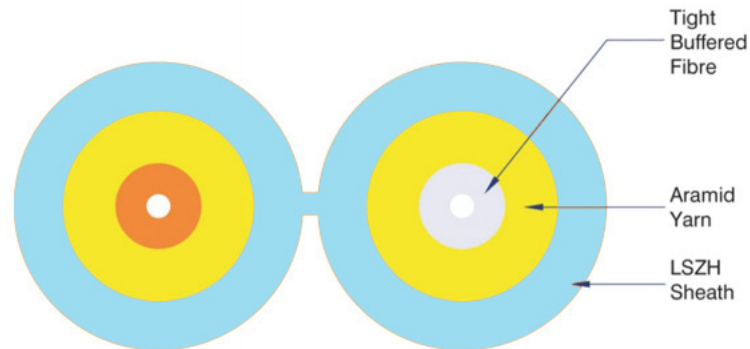

## Product Schematics


ST

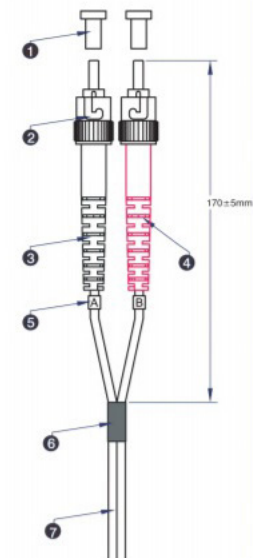

- 1 ST Dust cover
- 2 ST 3.0 multimode connector\*
- 3 ST 3.0 Black strain relief boot\*
- 4 ST 3.0 Red strain relief boot\*
- 5 Identification ring
- 6 Black heatshrink tubing
- 7 3.0mm Duplex OM1 62.5/125 LSOH Grey or Orange cable\*

\* 2.0 when used in hybrid cables with LC or MTRJ connectors


SC

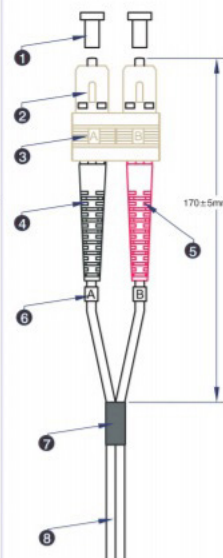

- 1 SC Dust cover
- 2 SC 3.0 Beige multimode connector\*
- 3 SC Beige clip
- 4 SC 3.0 Black strain relief boot\*
- 5 SC 3.0 Red strain relief boot\*
- 6 Identification ring
- 7 Black heatshrink tubing
- 8 3.0mm Duplex OM1 62.5/125 LSOH Grey or Orange cable\*

\* 2.0 when used in hybrid cables with LC or MTRJ connectors

LC

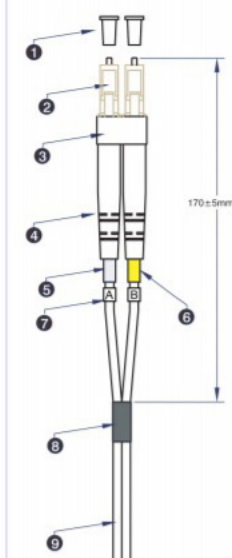

- 1 LC Dust cover
- 2 LC 2.0 multimode simplex Beige connector
- 3 LC Beige clip
- 4 LC 2.0 white boot
- 5 White heatshrink tubing
- 6 Yellow heatshrink tubing
- 7 Identification ring
- 8 Black heatshrink tubing
- 9 2.0mm Duplex OM1 62.5/125 LSOH Grey or Orange cable

# Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 1 m

Item Code: 200-005



## Standards

| Applicable standard       | Detail  |
|---------------------------|---|
| IEC 60793-1-1:2017        | Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance   |
| IEC 60793-2:2015          | Optical fibres - Part 2: Product specifications - General   |
| IEC 60793-2-10:2017       | Sectional specification for A1 multimode fibres   |
| IEC 60793-1-20:2014       | Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry  |
| IEC 60793-1-21:2001       | Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry  |
| IEC 60793-1-22:2001       | Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement  |
| IEC 60793-1-30:2010       | Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test  |
| IEC 60793-1-31:2010       | Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength  |
| ITU G.651.1               | Characteristics of a 50/125 µm multimode graded index optical fibre cable for the optical access network  |
| EN 50173-1:2018           | Information technology. Generic cabling systems - General requirements  |
| EN 50173-2:2007 + A1:2010 | Information technology. Generic cabling systems - Office premises   |
| IEC 61754-1:2013          | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance  |
| IEC 61754-2:1996          | Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family   |
| IEC 61754-4:2013          | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family  |
| IEC 61754-4-100:2015      | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces |
| RoHS                      | Restriction of Hazardous Substances - Compliant   |
| WFD                       | Compliant to Waste Framework Directive  |
| SCIP                      | Compliant - Does Not Contain Substances of Concern in Products  |

# Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 1 m

Item Code: 200-005



## Part Number Table

| Part Number | Description  |
|-------------|--|
| 200-001     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-ST Multimode 50/125 Duplex LS0H Aqua 1 m  |
| 200-002     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-ST Multimode 50/125 Duplex LS0H Aqua 2 m  |
| 200-003     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-ST Multimode 50/125 Duplex LS0H Aqua 3 m  |
| 200-004     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-ST Multimode 50/125 Duplex LS0H Aqua 5 m  |
| 200-005     | Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 1 m  |
| 200-006     | Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 2 m  |
| 200-007     | Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 3 m  |
| 200-008     | Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 5 m  |
| 200-009     | Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 10 m |
| 200-011     | Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 15 m |
| 200-012     | Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 20 m |
| 200-013     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-SC Multimode 50/125 Duplex LS0H Aqua 1 m  |
| 200-014     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-SC Multimode 50/125 Duplex LS0H Aqua 2 m  |
| 200-015     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-SC Multimode 50/125 Duplex LS0H Aqua 3 m  |
| 200-016     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-SC Multimode 50/125 Duplex LS0H Aqua 5 m  |
| 200-017     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-SC Multimode 50/125 Duplex LS0H Aqua 10 m |
| 200-018     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-SC Multimode 50/125 Duplex LS0H Aqua 15m  |
| 200-019     | Excel Enbeam OM3 Fibre Optic Patch Lead ST-SC Multimode 50/125 Duplex LS0H Aqua 20m  |
| 200-043     | Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex LS0H Aqua 1 m  |

# Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC Multimode 50/125 Duplex LS0H Aqua 1 m

Item Code: 200-005



|         |  |
|---------|--|
| 200-044 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex LS0H Aqua 2 m  |
| 200-046 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex LS0H Aqua 3 m  |
| 200-048 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex LS0H Aqua 5 m  |
| 200-050 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex LS0H Aqua 10 m |
| 200-052 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex LS0H Aqua 15 m |
| 200-053 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex LS0H Aqua 20 m |
| 200-054 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-SC Multimode 50/125 Duplex LS0H Aqua 1 m  |
| 200-055 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-SC Multimode 50/125 Duplex LS0H Aqua 2 m  |
| 200-056 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-SC Multimode 50/125 Duplex LS0H Aqua 3 m  |
| 200-057 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-SC Multimode 50/125 Duplex LS0H Aqua 5 m  |
| 200-058 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-SC Multimode 50/125 Duplex LS0H Aqua 10 m |
| 200-059 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-SC Multimode 50/125 Duplex LS0H Aqua 15 m |
| 200-061 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-SC Multimode 50/125 Duplex LS0H Aqua 20 m |
| 200-062 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-ST Multimode 50/125 Duplex LS0H Aqua 1 m  |
| 200-063 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-ST Multimode 50/125 Duplex LS0H Aqua 2 m  |
| 200-064 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-ST Multimode 50/125 Duplex LS0H Aqua 3 m  |
| 200-070 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-ST Multimode 50/125 Duplex LS0H Aqua 5 m  |
| 200-071 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-ST Multimode 50/125 Duplex LS0H Aqua 10 m |
| 200-073 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-ST Multimode 50/125 Duplex LS0H Aqua 15 m |
| 200-075 | Excel Enbeam OM3 Fibre Optic Patch Lead LC-ST Multimode 50/125 Duplex LS0H Aqua 20 m |

Excel Enbeam OM3 Fibre Optic Patch Lead SC-SC  
Multimode 50/125 Duplex LS0H Aqua 1 m

Item Code: 200-005



202-176

Excel Enbeam OM3 Fibre Optic Patch Lead LC-LC Multimode 50/125 Duplex  
LS0H Aqua 30 m

Excel is a world class premium performing end to end infrastructure solution designed,  
Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.